



1 PLAN
B900 SCALE 1:20

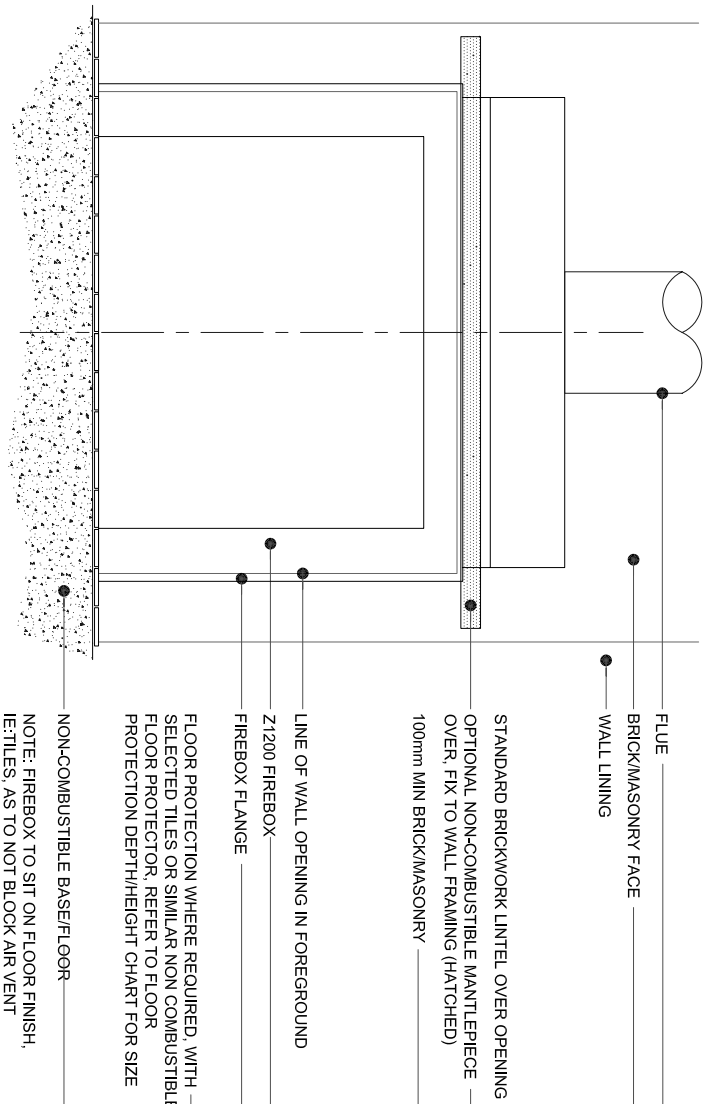

2 FRONT ELEVATION
B900 SCALE 1:20

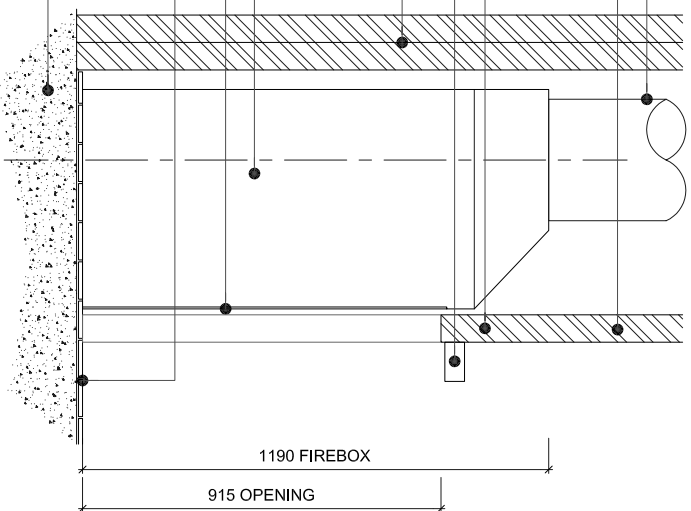

3 SIDE ELEVATION
B900 SCALE 1:20

FLUE
BRICKMASONRY FACE
WALL LINING
STANDARD BRICKWORK LINTEL OVER OPENING
OPTIONAL NON-COMBUSTIBLE MANTLEPIECE OVER, FIX TO WALL FRAMING (HATCHED)
100mm MIN BRICKMASONRY
LINE OF WALL OPENING IN FOREGROUND
Z1200 FIREBOX
FIREBOX FLANGE
FLOOR PROTECTION WHERE REQUIRED, WITH SELECTED TILES OR SIMILAR NON-COMBUSTIBLE FLOOR PROTECTOR, REFER TO FLOOR PROTECTION DEPTH/HEIGHT CHART FOR SIZE
NON-COMBUSTIBLE BASE/FLOOR
NOTE: FIREBOX TO SIT ON FLOOR FINISH, IE: TILES, AS TO NOT BLOCK AIR VENT

1300 OPENING
50
1200 FIREBOX
50
605 OPENING
555 FIREBOX
50
FLOOR PROTECTION
200
1615 FLOOR PROTECTION
200
200
BRICKMASONRY WALL
Z1200 FIREBOX
100mm MIN BRICKMASONRY, (FIREBOX FLANGE TO SIT OVER BRICK FACE)
FLUE
WALL LINING, (FIREBOX TO SIT FLUSH WITH WALL LINING FACE)
BRICKMASONRY FACING, TO SIT OVER FIREBOX FLANGE
NON-COMBUSTIBLE FLOOR PROTECTION
OPTIONAL NON-COMBUSTIBLE MANTLEPIECE OVER, FIX TO WALL FRAMING (HATCHED)
NON-COMBUSTIBLE BASE/FLOOR
FIREBOX FLANGE

FLOOR PROTECTION:

- ALL FLOOR PROTECTION SPECIFICATIONS ARE MINIMUM REQUIREMENTS. THE DEPTH OF EACH FLOOR PROTECTOR IS RELATED TO THE HEIGHT OF THE FIREBOX FROM THE FLOOR, REFER TO THE DEPTH/HEIGHT CHART. A MINIMUM DEPTH OF 300mm MUST BE MAINTAINED
- FOR NON-COMBUSTIBLE FLOORS, FLOOR PROTECTION IS NOT NECESSARY, HOWEVER IT IS RECOMMENDED THAT IF FLOOR COVERINGS USED, EG: CARPET, TIMBER OR VINYL THAT THE COVERING BE TRIMMED TO THE MINIMUM CLEARANCES
- FOR COMBUSTIBLE FLOORS OR RAISED PLINTHS THE BROADY'S INSULATED PLINTH BENEATH THE FIREBOX AND 75mm WOODTEX FLOOR PROTECTOR IN FRONT TO MINIMUM DEPTH MUST BE USED. THE COMBINATION OF THESE TWO PLUS TILES OR SLATE ETC. TOTALS A 90mm HEIGHT FOR THE FLOOR PROTECTOR. REFER TO INSTALLATION REQUIREMENTS

SEISMIC RESTRAINT:

- SECURE WITH 2xCS 'DYNOL' BOLTS THROUGH FLOOR OF FIREBOX INTO CONCRETE BASE



SPECIALISING IN COOKERS, WOODSTOVES & FIREPLACES SINCE 1885

TITLE:
Z1200 FIRE BOX
BRICKMASONRY INSTALL
ONTO CONCRETE FLOOR

SCALE: A4 1:20 DATE: FEB 06

BROADY'S NZ LIMITED

46a SIR WILLIAM AVENUE, EAST TAMAKI
PO BOX 58-183-GREENMOUNT, AUCKLAND
www.broadys.co.nz

T. +64 9 274 0658 F. +64 9 272 2519